

Series	Emergency Battery	Color LEDs	Opal Diffuser	Dimming	Exterior	Interior	Feed-Thru	Other Options
L2158	●	●	●	●	●	●	●	Faceplate colors Junction box

Steplites

L2158 SERIES

Description

The L2158 Series of Steplites offers an ultra low-profile site fixture that is available with cast and stainless steel louver, and cast and stainless steel non-louver variations. Its width allows excellent light distribution to the sides in a variety of interior or exterior locations.

Features

Louvers in the L2158 Series are more widely spaced than in most fixtures of this type, allowing for significantly greater forward projected illumination. The thick cast aluminum louvered faceplate also provides exceptional durability. Cole Steplites feature an optional cast aluminum junction box which may be easily field mounted to either the back or bottom of the housing to best suit installation conditions.

Applications

The L2158 Series of Steplites are suitable for concrete pour/block wall and stud wall mounting in indoor or outdoor installations. They are ideal in low walls and step risers where wide spacing is desirable.

Custom

If your project demands a special fixture we would be pleased to discuss the production of modified standard fixtures or custom fixtures to suit your specific conditions. For more information on our custom capabilities, please contact your local Cole representative.



L2158W-J-BLK



L2158GW-J



L2158W-N-J — Stainless Steel



L2158GW-B-J — Bronze

L2158 Series steplites are available with cast aluminum, stainless steel or cast bronze faceplates.



The junction box on Cole Steplites may be field mounted to the back or bottom of the fixture.




C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593


Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com

Steplites

Louvered faceplate

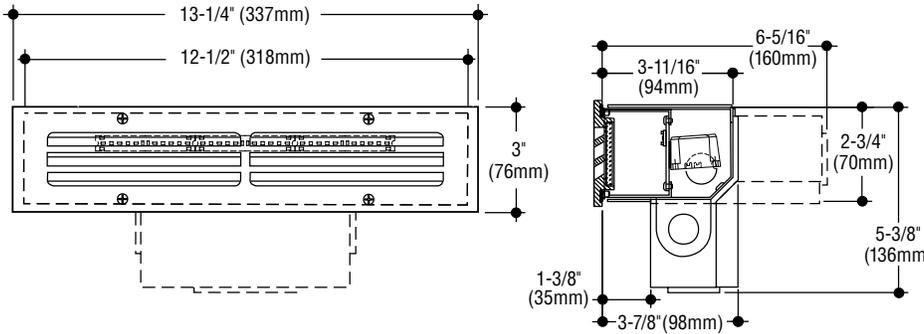

Non-louvered faceplate

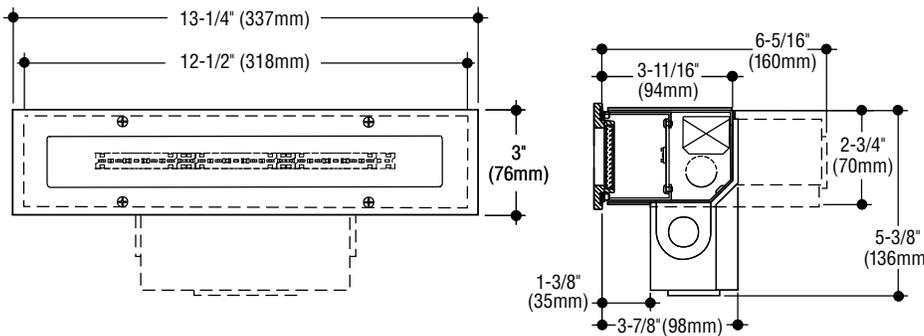

L2158 SERIES

SPECIFICATIONS

Construction

- Fixture housing is constructed from die-formed 16 gauge electro-galvanized steel finished with a white polyester coating
- Faceplate is cast aluminum with metallic aluminum polyester coating or 3/16" stainless steel with brushed finish
- Each trim is gasketed and retained by stainless steel screws
- Diffuser is frosted tempered glass set in silicone sealant
- Reflector is constructed of white die-formed aluminum
- Optional junction box is cast aluminum with polyester coating
- cETLus listed, suitable for wet locations in any wall construction.

Electrical

- Fixture is wired with high performance LEDs and available in a variety of colors. Integral driver is standard universal voltage; optional 0-10V dimming driver available
- Housing provided with 1/2" conduit knockout on each side, suitable for 4 wire thru-wiring, 2 in 2 out
- Optional junction box allows 8 wire thru-wiring, 4 in 4 out. Provided with two 1/2" tapped conduit entrances in the bottom and one 1/2" tapped conduit entrance in each side.

Mounting

Housing has flange with holes for mounting.

Catalog Numbers

Lamps

LED 4.5W, (377 lm @ 3000°K)

LED 9.6W, (993 lm @ 3000°K)

Lumens shown are source.

Photometric data available for Steplites can be downloaded at: <https://www.colelighting.com/photometrics>

Faceplate

Alum. Louver

L2158W

L2158W-HO

Alum. Non-Louwer

L2158GW

L2158GW-HO

S.S. Louver

L2158W-N

L2158W-N-HO

S.S. Non-Louwer

L2158GW-N

L2158GW-N-HO

Options

Junction box: Bottom or back mounted as required for feed-thru. Add suffix **-J**.

Cast Bronze faceplate: Satin finished, clear coated faceplate. Add suffix **-B**

Tamperproof screws: Socket head faceplate screws. Add suffix **-TP**.

Alternate faceplate color: Black, White or custom color. Add suffix **-BLK**, **-WHT** or **-CC** (Contact factory for custom preference).

Opal glass diffuser: Tempered. Add suffix **-OPL**.

Dimming: Universal voltage 0-10V driver. Add suffix **-DIM**.

Emergency battery (4 Watt): Provides up to 90 minutes operation. Add suffix **-EM**.

LED colors:

4000°K (438lm), **-HO** (1152lm) Add suffix **-4K**.

Amber (FWC compliant, 590nm).

Add suffix **-AMB**.

Blue Add suffix **-BLU**.

Voltage: 277V. Add suffix **-277**.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.

C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473

Fax (626) 443-9253

info@colelighting.com

www.colelighting.com