

JOB NAME _____

TYPE _____

CATALOG NUMBER _____

Steplites 157 SERIES

SPECIFICATIONS

Construction


- Recessed housing is constructed from die-formed 16 gauge electro-galvanized steel and is coated with white polyester
- Surface housing is cast aluminum with metallic aluminum polyester coating
- Faceplate is cast aluminum with metallic aluminum polyester coating, gasketed and retained by stainless steel screws
- Diffuser is frosted tempered glass, set in silicone sealant
- Optional junction box is cast aluminum with polyester coating
- cETLus listed, suitable for wet locations in any wall construction
- Suitable for any wall construction
- All models suitable for wet locations.

Electrical

- Fixture is wired with high performance LED modules, or one E26 medium base lamp socket
- Integral driver is standard universal voltage; optional 0-10V dimming driver available
- Standard recessed and surface housing allows for 4 thru-wiring, 2 in and 2 out
- Housing provided with 1/2" conduit knockout on each side suitable for 4 wire thru-wiring, 2 in and 2 out
- Optional junction box allows 8 wire thru-wiring, 4 in and 4 out. Provided with two 1/2" tapped conduit entrances in the bottom and one 1/2" tapped conduit entrance in each side.

Mounting

Housing has flange with holes for mounting.

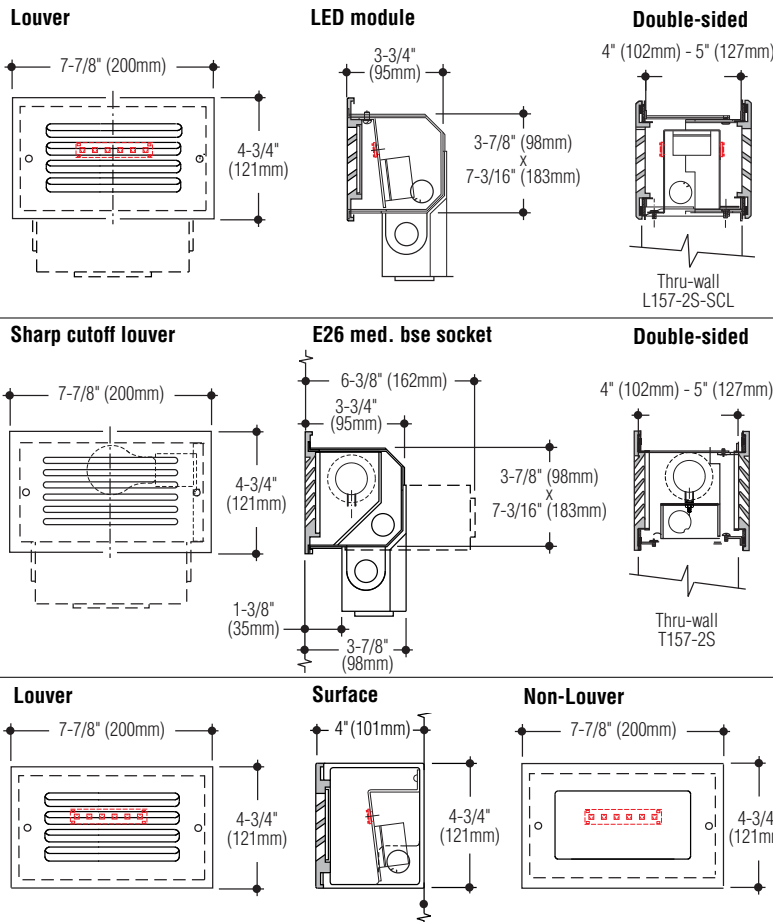

Catalog Numbers	Recessed Fixtures		Thru-Wall		Surface Fixtures	
	Faceplate		Faceplates		Faceplate	
	Louver	Non-Louver	Louver	Non-Louver	Louver	Non-Louver
LED 1.5W, (126 lm @ 3000°K)*	<input type="checkbox"/> L157W	<input type="checkbox"/> L157GW	<input type="checkbox"/> L157W-2S	<input type="checkbox"/> L157GW-2S	<input type="checkbox"/> SL157W	<input type="checkbox"/> SL157GW
LED 3.4W, (331lm @ 3000°K)*	<input type="checkbox"/> L157W-HO	<input type="checkbox"/> L157GW-HO	<input type="checkbox"/> L157W-2S-HO	<input type="checkbox"/> L157GW-2S-HO	<input type="checkbox"/> SL157W-HO	<input type="checkbox"/> SL157GW-HO
LED 6.8W, (662 lm @ 3000°K)*	<input type="checkbox"/> L157W-HO-2	<input type="checkbox"/> L157GW-HO-2	—	—	<input type="checkbox"/> SL157W-HO-2	<input type="checkbox"/> SL157GW-HO-2
One E26 medium base lamp	<input type="checkbox"/> T157W	<input type="checkbox"/> T157GW	<input type="checkbox"/> T157W-2S	<input type="checkbox"/> T157GW-2S	<input type="checkbox"/> ST157W	<input type="checkbox"/> ST157GW

Lumens shown are source. *Indicated values for wattage and lumens doubled for thru-wall models.

Photometric data available for Steplites can be downloaded at: <https://www.colelighting.com/photometrics>

Options

Junction box: Bottom or back mounted junction box for feed-thru. Add suffix -J (Not available with surface or thru-wall models).

Sharp cutoff louver: Below horizontal illumination. Add suffix -SCL.

Cast Bronze faceplate and surface housing: Satin finish, clear coated. Add suffix -B.

Stainless Steel housing: 16 gauge stainless steel recessed housing. Add suffix -SS.

Alternate faceplate color: Black, white or custom color. Add suffix -BLK, -WHT or -CC.

Opal glass diffuser: Tempered. Add suffix -OPL.

Tamperproof screws: Socket head faceplate screws. Add suffix -TP.

Dimming: Universal voltage, 0-10V driver.

Add suffix -DIM.

Emergency battery (4 Watt): Provides up to 90 minutes operation. Add suffix -EM.

LED colors:

4100°K (146 lm), -HO (384 lm), -HO-2 (768 lm).

Add suffix. Add suffix -4K.

Amber* (FWC compliant, 590 nm). Add suffix -AMB.

Blue* Add suffix -BLU.

*Not available in HO or HO-2

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473

Fax (626) 443-9253

info@colelighting.com

www.colelighting.com