

JOB NAME _____

Type _____

CATALOG NUMBER _____

Steplites

158 SERIES

SPECIFICATIONS

Construction

- Fixture housing is constructed from die-formed 16 gauge electro-galvanized steel finished with a white polyester coating
- Faceplate is cast aluminum with metallic aluminum polyester coating, gasketed and retained by stainless steel screws
- Diffuser is frosted tempered glass, set in silicone sealant
- Optional junction box is cast aluminum with polyester coating
- All models are cETLus listed for wet locations in any wall construction.

Electrical


- Fixture is wired with high performance LED modules or one E26 medium base lamp socket
- Integral driver is standard universal voltage
- Housing provided with 1/2" conduit knockout on each side suitable for 4 wire thru-wiring, 2 in and 2 out
- Optional junction box allows 8 wire thru-wiring, 4 in and 4 out. Provided with two 1/2" tapped conduit entrances in the bottom and one 1/2" tapped conduit entrance in each side.

Mounting

Housing has flange with holes for mounting.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions

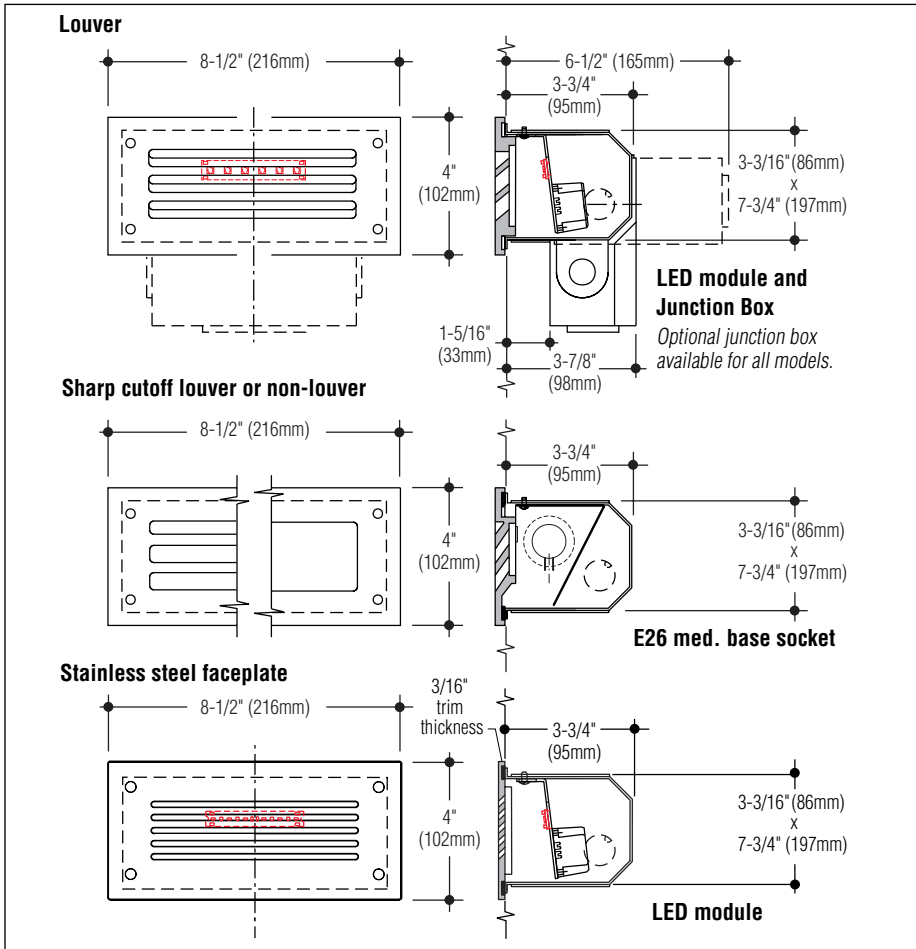

Catalog Numbers

Lamp

LED 1.5W, (126 lm @ 3000°K)
 LED 3.4W, (331 lm @ 3000°K)
 LED 6.8W, (662 lm @ 3000°K)
 One E26 medium base lamp

Lumens shown are source.

Photometric data available for Steplites can be downloaded at: <https://www.colelighting.com/photometrics>

Faceplate

Louver

L158W
 L158W-HO
 L158W-HO-2
 T158W

Non-Louver

L158GW
 L158GW-HO
 L158GW-HO-2
 T158GW

Options

Junction box: Bottom or back mounted junction box for feed-thru. Add suffix -J.

Stainless Steel faceplate: 3/16" thick narrow louvered or glass trim non-louver faceplate. Add suffix -N.

Sharp cutoff louver: Below horizontal illumination, cast aluminum. Add suffix -SCL.

Cast Bronze faceplate: Satin finish, clear coated. Add suffix -B.

Stainless Steel housing: 16 gauge stainless steel recessed housing. Add suffix -SS.

Dimming: Universal voltage 0-10V driver. Add suffix -DIM.

Emergency battery (4 Watt): Provides up to 90 minutes operation. Add suffix -EM.

Alternate faceplate color: Black, white or custom color. Add suffix -BLK, -WHT, or -CC.

Opal glass diffuser: Tempered. Add suffix -OPL.

Spread Lens: Ribbed tempered glass. Add suffix -ST.

Tamperproof screws: Socket head faceplate screws. Add suffix -TP.

LED colors:

4000°K (146 lm), -HO (384 lm), -HO-2 (768 lm). Add suffix -4K.

Amber.* Add suffix -AMB.

Blue.* Add suffix -BLU.

*Not available in HO-2.

C.W. Cole & Company, Inc.
 2560 Rosemead Boulevard
 South El Monte, CA 91733-1593

Tel. (626) 443-2473

Fax (626) 443-9253

info@colelighting.com

www.colelighting.com