

JOB NAME _____

Type _____

CATALOG NUMBER _____

Steplites

L2100E "DOME" SERIES

SPECIFICATIOIS

Construction


• Fixture housing, suitable for concrete pour, is constructed from die-formed 16 gauge electro-galvanized steel and is coated with white polyester • Faceplate is cast aluminum with textured black coating, gasketed and retained by stainless steel screws • Diffuser is clear tempered glass set in silicone sealant • Optional junction box is cast aluminum with polyester coating • cETLus listed, suitable for wet locations in any wall construction.

Electrical

• High performance LEDs are available in a variety of colors • Integral driver is standard universal voltage; optional 0-10v dimming driver available • Housing provided with 1/2" conduit knockout on each side suitable for 4 wire thru-wiring, 2 in and 2 out • Optional junction box allows 8 wire thru-wiring, 4 in and 4 out. Provided with two 1/2" tapped conduit entrances in the bottom and one 1/2" tapped conduit entrance in each side.

Mounting

Housing has flanges with holes for mounting.

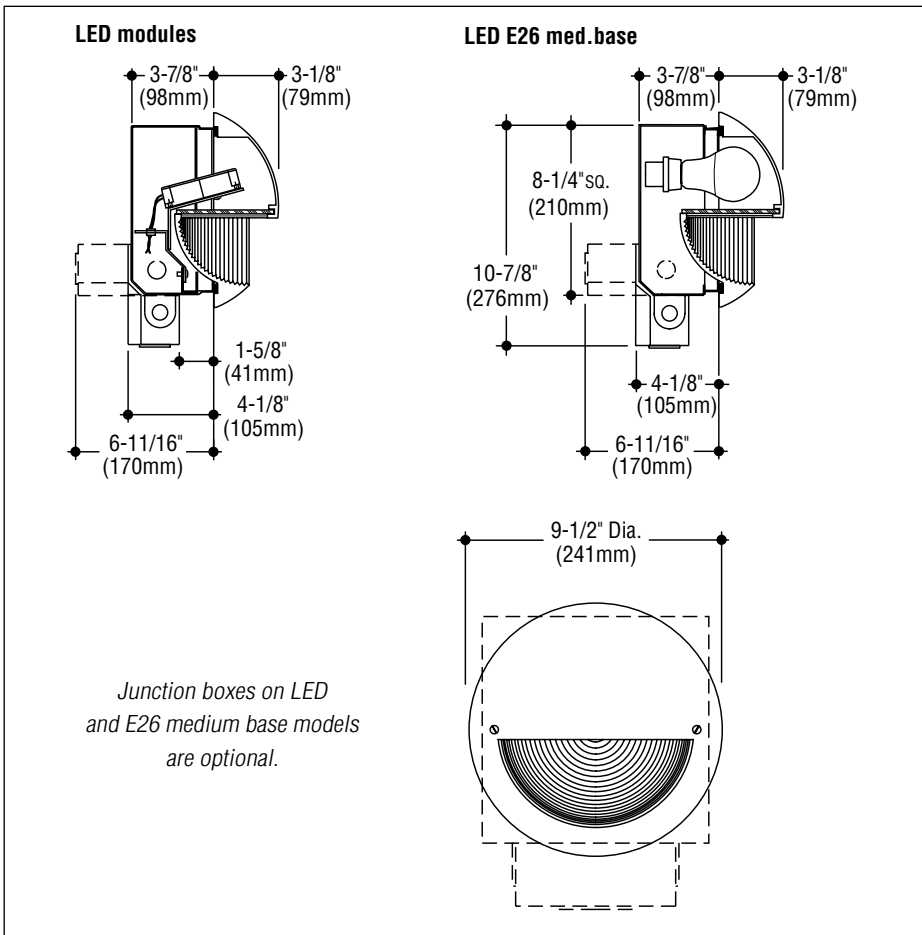

Catalog Numbers

Lamp

LED 9.45W, (1350 lm @ 3000°K)
One E26 medium base lamp socket

- L2100EW
- T2100EW

Lumens shown are source.

Photometric data available for Steplites can be downloaded at: <https://www.colelighting.com/photometrics>

Options

Cast Bronze faceplate: Satin finished, clear coated. Add suffix -B.

Junction box: Bottom or back mounted as required for feed-thru. Add suffix -J.

Alternate faceplate color: Metallic aluminum or textured white. Add suffix -ALU or -WHT.

Tamperproof screws: Socket head faceplate screws. Add suffix -TP.

Voltage: 277V ballast. Add suffix -277.

Dimming: Universal voltage, 0-10V dimming driver. Add suffix -DIM

Emergency battery (4 Watt): Provides up to 90 minutes operation. Add suffix -EM.

LED colors:

4000°K (1410 lm). Add suffix -4K.

Blue. Add suffix -BLU.

Amber. Add suffix -AMB.

Amber 590. (590 nm, FWC compliant). Add suffix -AMB/590.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com