


JOB NAME _____

TYPE _____

CATALOG NUMBER _____

Steplites

L211 SERIES

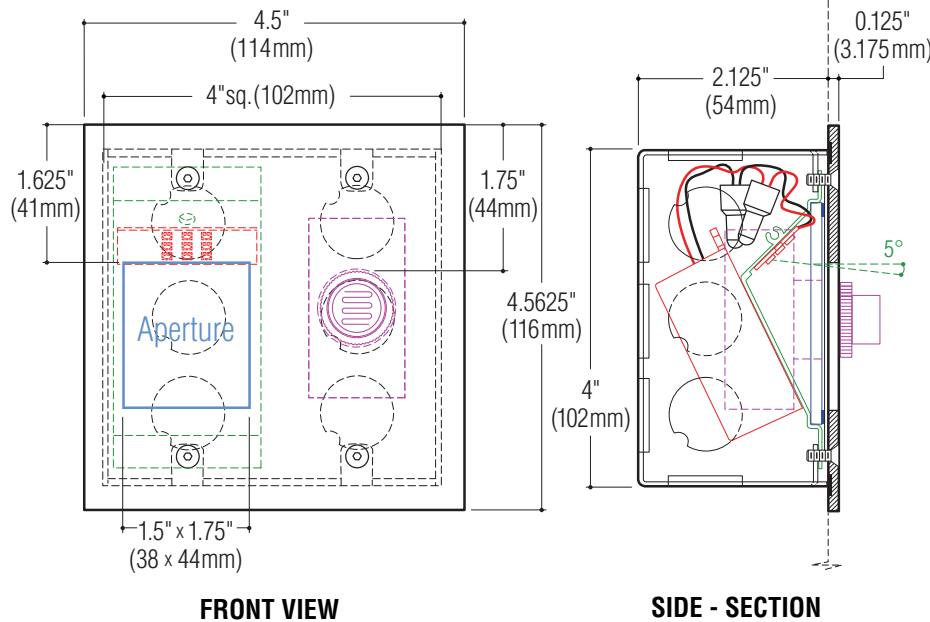

SPECIFICATIONS

Construction

- Furnished with a galvanized steel Steel City® (Cat.# 132-W-1/2) or equal, double-gang box
- Faceplates are 1/8" thick
- Aluminum faceplates are with a white polyester finish; Stainless steel are satin finished, passivated for maximum rust resistance
- Fixtures are furnished with stainless steel socket head tamperproof screws
- Diffuser is clear tempered glass, set in silicone sealant
- Internal baffle is coated matte black to minimize LED glare
- cETLus listed.

Electrical

- Fixture is wired with high performance LEDs available in a variety of colors
- Integral universal voltage driver
- Available with ELV dimming capability; 120V only
- Housing provided with multiple 1/2" conduit knockouts
- Choices of power and USB receptacles, switches, and sensors are offered.

Mounting

Housing has holes for mounting.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.

Catalog Number	Faceplate	
	Aluminum	Stainless Steel
Lamp		
LED 3.15W, (450 lm @ 3000°K)	<input type="checkbox"/> L211-AL-*	<input type="checkbox"/> L211-N-*

Lumens shown are source. | * = Mandatory suffix required, either a sensor or a device
 Photometric data available for Steplites can be downloaded at: <https://www.colelighting.com/photometrics>

Options

LED colors:

- 2700°K (437 lm). Add suffix -27K.
- 4000°K (470 lm). Add suffix -4K.
- Amber. Add suffix -AMB.
- 590nm Amber (FWC compliant). Add suffix -AMB/590.
- Blue. Add suffix -BLU.

- Frosted glass diffuser:** Tempered. Add suffix -FG
- Bronze trim:** Satin finished, clear coated. Add suffix -B.

Alternate trim color ("AL" only):

- Metallic silver aluminum. Add suffix -ALU,
- Black. Add suffix -BLK,
- Custom color or finish (consult factory for choices). Add suffix -CC.

Antimicrobial white paint: Coating that resist bacterial growth. Add suffix -AM.

Voltage: 277V driver, non-dimming (Increases housing depth to 3.5"). Add suffix -277.

Dimming: ELV dimming driver (120V only). Add suffix -DIM.

***Sensors:**

- Photocell. Add suffix -PC,
- Occupancy Sensor. Add suffix -OCC,
- Button/Switch -SW.

***Devices:**

- Duplex. Add suffix -DUP,
- Universal Serial Bus port. Add suffix -USB,
- Duplex and USB port. Add suffix -DUP/USB.

Weatherproof: Exterior use. For OCC and PC devices only. Add suffix -W.



C.W. Cole & Company, Inc.
 2560 Rosemead Boulevard
 South El Monte, CA 91733-1593

Tel. (626) 443-2473
 Fax (626) 443-9253
 info@colelighting.com
www.colelighting.com