


JOB NAME _____

Type _____

CATALOG NUMBER _____

SL SERIES

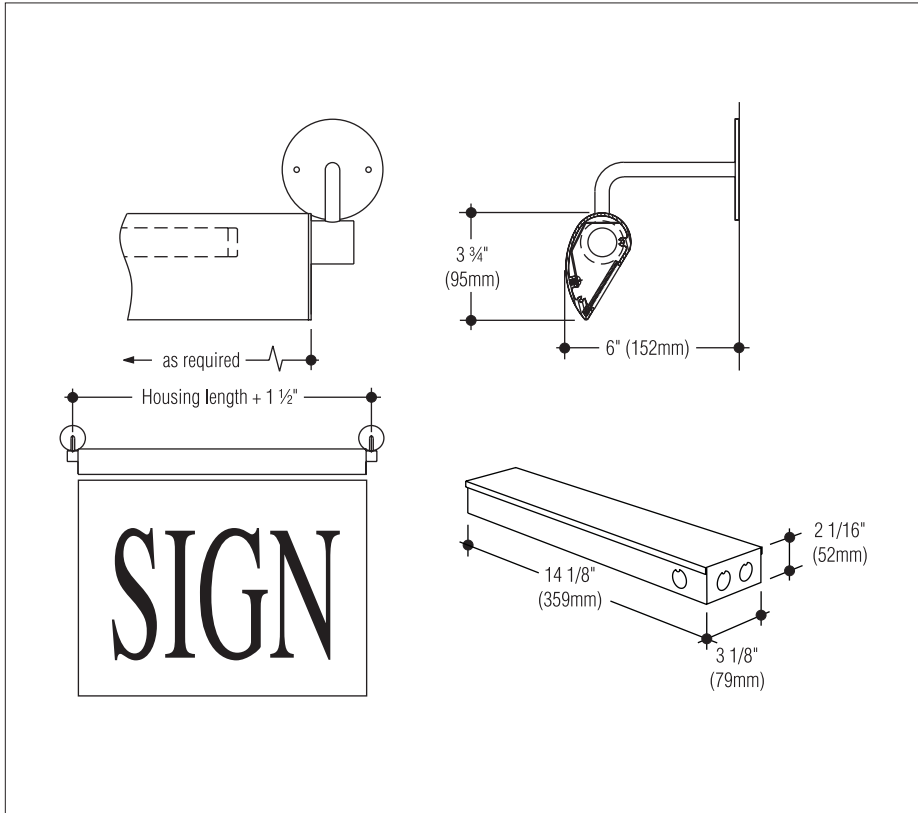

Specifications

Construction

- Fixture housing is extruded aluminum; maximum continuous length is 20'-0"
- Finish is metallic aluminum polyester coating. Other finishes are available.
- Lens is clear acrylic with linear prisms
- Reflector is adjustable for vertical light distribution
- Suitable for wet locations with lamp above lens.

Electrical

- Fixture is wired for T8 rapid-start or T8 or T5 high output fluorescent lamp(s), available in various lengths, as required
- Remote ballast is standard electronic 120V-277V (347V optional). Connecting flexible conduit not included.

Mounting

- Brackets mount with two screws (not included).
- Left bracket to be mounted over conduit flush with wall, unless otherwise specified
- Remote ballast to be within 18' of lamp

How to Specify

1. Select catalog number and add length required.
2. Add suffix(es) for desired options.

Catalog Number

Lamp

- 17W, 25W, 32W, 40W, or 59W T8 fluor. SL- (Housing length): _____
- 44W, 55W, 65W, or 86W T8 high output fluor. SL- (Housing length): _____ -T8HO
- 24W, 39W, or 54W T5 high output fluor. SL- (Housing length): _____ -T5HO

- Notes: 1. Housing length must be at least 3½" more than the nominal lamp length.
 Example: SL-39½" is minimum for 36" F25T8 lamp.
2. Maximum continuous housing length is 20'-0" (6100mm)

Options

Alternate Arms: Provide detail. To specify, add suffix -ARM.

Alternate Painted Finishes:

Black, add suffix -BLK.

Medium bronze, add suffix -MBZ.

White, add suffix -WHT.

Other color, add suffix -SP/ (color).

Ballasts:

277V ballast. To specify, add suffix -277.

347V ballast. To specify, add suffix -347.

Brushed Natural Finish: Clear anodized.

To specify, add suffix -BNF.

Weatherproof: Only with lamp above lens.

To specify, add suffix -W.



C. W. Cole & Company, Inc.
 2560 N. Rosemead Boulevard
 South El Monte, CA 91733-1593

Fax (626) 443-9253

Tel. (626) 443-2473

info@colelighting.com

www.colelighting.com