


JOB NAME \_\_\_\_\_

Type \_\_\_\_\_

CATALOG NUMBER \_\_\_\_\_

## Aluminex Aluminum Exit Signs

### Interior/Exterior Applications

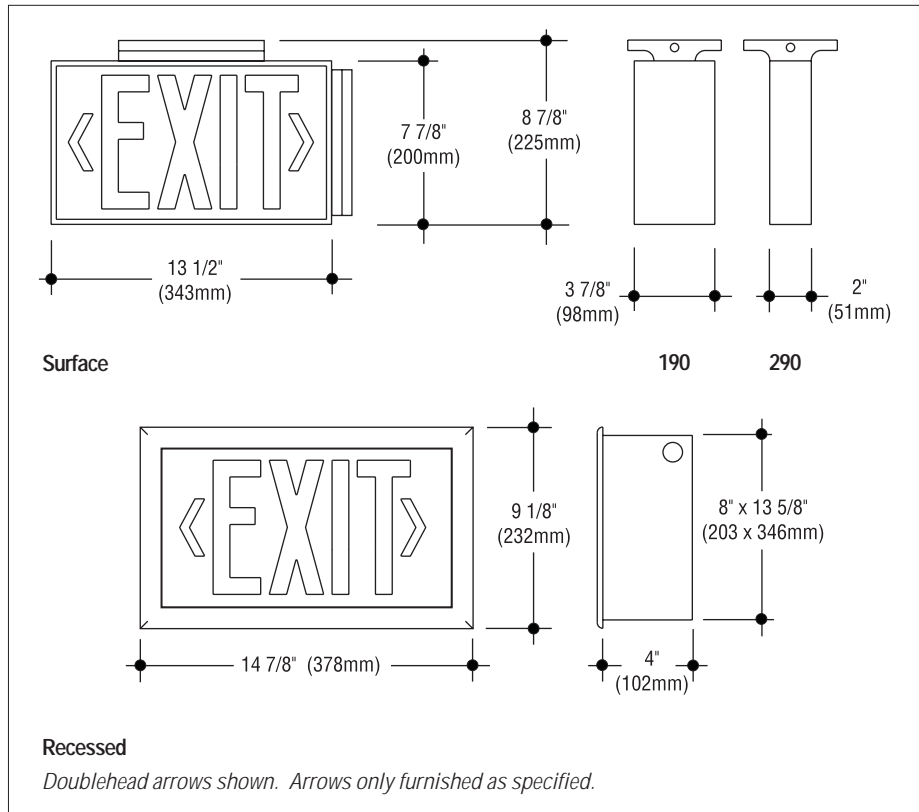

#### Specifications

##### Construction

- Sign is constructed from extruded aluminum
- Recessed housing is 16 gauge steel, suitable for poured concrete construction
- Bracket is die-cast aluminum
- Surface housing, recessed sign trim, and bracket finish is semi-gloss black paint
- Face is natural satin finish with clear anodize
- Letters and arrows are stencil cut in faceplate, backed with .125" acrylic diffuser
- Downlite lens is .125" clear prismatic acrylic
- Underwriters Laboratories, Inc. listed, suitable for wet locations when specified.

##### Electrical

- Sign is wired for lamps of varying types and wattages. Ballasts are standard 120V (277V optional)
- Incandescent and fluorescent signs are wired for two circuits
- Lamps are included with sign
- When emergency battery operation is specified, all components are contained in housing. Nickel cadmium battery, test light and button, and two F6T5 fluorescent lamps or LEDs are included with the -EM option.

##### Mounting

- Surface signs mount to junction box.
- Recessed housing has holes for mounting.

Catalog Numbers	190 Series					290 Series					
	Single Face			Double Face		Single Face			Double Face		
Lamps	Back	Ceiling	End	Recessed	Ceiling	End	Back	Ceiling	End	Ceiling	End
2 x 25W T6½ intermediate base incandescent	<input type="checkbox"/> T 195	<input type="checkbox"/> T 196	<input type="checkbox"/> T 198	<input type="checkbox"/> T 197	<input type="checkbox"/> TD 196	<input type="checkbox"/> TD 198	<input type="checkbox"/> T 295	<input type="checkbox"/> T 296	<input type="checkbox"/> T 298	<input type="checkbox"/> TD 296	<input type="checkbox"/> TD 298
2 x 7W (G23 base) compact fluorescent	<input type="checkbox"/> F 195	<input type="checkbox"/> F 196	<input type="checkbox"/> F 198	<input type="checkbox"/> F 197	<input type="checkbox"/> FD 196	<input type="checkbox"/> FD 198	---	---	---	---	---
LED (light-emitting diode)	<input type="checkbox"/> L 195	<input type="checkbox"/> L 196	<input type="checkbox"/> L 198	<input type="checkbox"/> L 197	<input type="checkbox"/> LD 196	<input type="checkbox"/> LD 198	<input type="checkbox"/> L 295	<input type="checkbox"/> L 296	<input type="checkbox"/> L 298	<input type="checkbox"/> LD 296	<input type="checkbox"/> LD 298

**Required Suffixes**

Letter color      -RED    -GRN

Voltage            -120    -277 (available in fluorescent and LED only)

#### Options

- Directional Arrows:** Arrow left, -AL;  
 Arrow right, -AR; Doublehead, -A2;  
 Left and right (for double face), -A.
- Tamperproof Screws:** Tamperproof allen head faceplate screws. Add suffix -TP.
- Long-life Diode:** Incandescent only. Packed separately for contractor installation. Add suffix -LL.
- Emergency Battery Operation:** Integral circuitry for 1½ hour fluorescent or red LED operation. Add suffix -EM.

- Pendant Mount:** Provides canopy and one 18" stem. Use ceiling model number and add suffix -S1.
- Pedestal Mount:** Provides threaded flange on bottom for 1¼" pipe. Add suffix -PED.
- Weatherproof:** Add suffix -W.

#### How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



C. W. Cole & Company, Inc.  
 2560 N. Rosemead Boulevard  
 South El Monte, CA 91733-1593

Fax      (626) 443-9253  
 Tel.     (626) 443-2473  
 info@colelighting.com  
 www.colelighting.com