


JOB NAME _____

Type _____

CATALOG NUMBER _____

Signs
Directional Signs
S130 SERIES

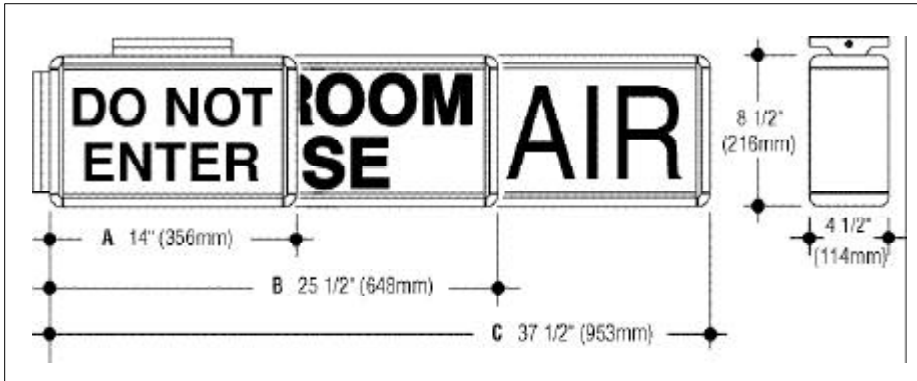

Specifications

Construction

- Fixture housing is constructed from extruded aluminum with die-cast aluminum ends
- Standard finish is white polyester
- Sign panels are .125" white acrylic
- Sign panels slide in with one end removed
- End or ceiling brackets are die-cast aluminum
- Listed by Underwriters Laboratories, Inc.

Copy

- Copy is silk-screened on white background. Other colors and letter styles are available
- Custom copy may be applied vinyl letters for small quantities
- Special graphics are available
- Optional Read-Out Face provides blank bronze panel with copy visible only when lighted

Electrical

- Fixture is wired for lamps of varying types and wattages.
- Fluorescent ballasts are standard 120V (277V optional)

Mounting

- Surface wall mounted fixtures have holes in back panel for direct mounting to junction box
- End or top brackets have mounting plate for direct mounting to junction box.

How to Specify

1. Select catalog number with desired features.
2. Add suffix for desired copy, or **-CC** and specify copy requirement.
3. Add suffixes for options required to meet job conditions.

Size A

DO NOT ENTER A10 red	AREA OF RESCUE ASSISTANCE A11 blue	MEN A12 black	WOMEN A13 black	DARKROOM IN USE A14 red	X-RAY IN USE A15 red
LASER IN USE A16 red	X-RAY ROOM IN OPERATION DO NOT ENTER A17 red	ON THE AIR A18 red	X-RAY ON A19 red	IN USE A20 red	BEAM ON A21 red

Size B

STAIRS B50 black	AREA OF RESCUE ASSISTANCE B51 blue	WOMEN B52
IN USE B53 red	X-RAY ON B54 red	X-RAY ROOM IN USE B55 red

Size C

ESCALATOR C80 black	AREA OF RESCUE ASSISTANCE C81 blue
FIRE ESCAPE C83 red	ON THE AIR C84 red

Catalog Numbers

Lamps	Size		
	A	B	C
2 x 25W T6½ intermediate base incandescent	<input type="checkbox"/> S130A-*	—	—
4 x 25W T6½ intermediate base incandescent	—	<input type="checkbox"/> S130B-*	—
6 x 25W T6½ intermediate base incandescent	—	—	<input type="checkbox"/> S130C-*
2 x 7W (G23 base) compact fluorescent	<input type="checkbox"/> SF130A-*	—	—
2 x 17W T8 fluorescent	—	<input type="checkbox"/> SF130B-*	—
2 x 25W T8 fluorescent	—	—	<input type="checkbox"/> SF130C-*

* Add suffix for copy required.

Options

- Ballasts:** 277V ballast. Add suffix -277.
- High power factor (standard on T8). Add suffix -HPF.
- Alternate Color:** Black. Add suffix -BLK.
- Mounting** (back wall is standard):
- Right end. Add suffix -RE.
- Left end. Add suffix -LE.
- Top. Add suffix -C.

- Pendant. Add suffix -S (stem length)
- Custom Copy:** Add suffix -CC and specify copy requirement.
- Double Face:** Add suffix -D.
- Flasher :** Incandescent only. Add suffix -FL.
- Read-Out Face:** Provides copy on bronze background, visible only when lighted. Add suffix -ROF.



C. W. Cole & Company, Inc.
2560 N. Rosemead Boulevard
South El Monte, CA 91733-1593

Fax (626) 443-9253
Tel. (626) 443-2473
info@colelighting.com
www.colelighting.com