

JOB NAME _____


Type _____

CATALOG NUMBER _____

Slicker

Stainless Steel Exit Signs

Interior/Exterior Applications

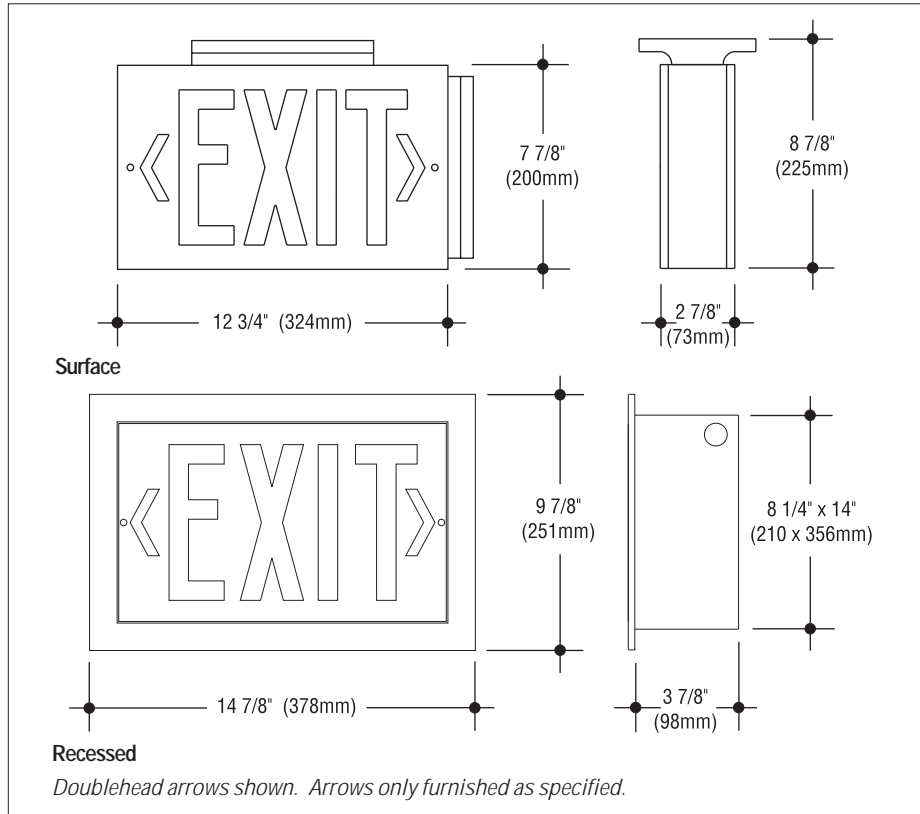

Specifications

Construction

- Sign surface housing, faceplate, and bracket are constructed from 20 gauge 304 stainless steel with a brushed satin finish
- Recessed housing is 16 gauge steel, suitable for poured concrete construction
- Letters and arrows are stencil cut in faceplate, backed with .125" acrylic diffuser
- Ceiling/wall bracket is die-cast aluminum, painted black
- Downlite lens is .125" clear prismatic acrylic
- Underwriters Laboratories, Inc. listed, suitable for wet locations when specified.

Electrical

- Sign is wired for lamps of varying types and wattages. Ballasts are standard 120V (277V optional)
- Incandescent and fluorescent signs are wired for two circuits
- Lamps are included with sign
- When emergency battery operation is specified, all components are contained in housing. Nickel cadmium battery, test light and button, and two F6T5 fluorescent lamps or LEDs are included with the -EM option.

Mounting

- Surface signs mount to junction box.
- Recessed housing has holes for mounting.

Catalog Numbers	Single Face			Double Face		
	Back	Ceiling	End	Recessed	Ceiling	End
2 x 25W T6½ intermediate base incandescent	<input type="checkbox"/> TN 205	<input type="checkbox"/> TN 206	<input type="checkbox"/> TN 208	<input type="checkbox"/> TN 207	<input type="checkbox"/> TDN 206	<input type="checkbox"/> TDN 208
2 x 7W (G23 base) compact fluorescent	<input type="checkbox"/> FN 205	<input type="checkbox"/> FN 206	<input type="checkbox"/> FN 208	<input type="checkbox"/> FN 207	<input type="checkbox"/> FDN 206	<input type="checkbox"/> FDN 208
LED (light-emitting diode)	<input type="checkbox"/> LN 205	<input type="checkbox"/> LN 206	<input type="checkbox"/> LN 208	<input type="checkbox"/> LN 207	<input type="checkbox"/> LDN 206	<input type="checkbox"/> LDN 208

Required Suffixes

Letter color -RED -GRN

Voltage -120 -277 (available in fluorescent and LED only)

Options

Directional Arrows: Arrow left, -AL; Arrow right, -AR; Doublehead, -A2; Left and right (for double face), -A.

Tamperproof Screws: Tamperproof allen head faceplate screws. Add suffix -TP.

Long-life Diode: Incandescent only. Packed separately for contractor installation. Add suffix -LL.

Emergency Battery Operation: Integral circuitry for 1 1/2 hour fluorescent or red LED operation. Requires oversize canopy or other dimension changes. Add suffix -EM.

Pendant Mount: Provides canopy and 18" stem. Use ceiling model number and add suffix -S1.

Pedestal Mount: Provides threaded flange on bottom for 1 1/4" pipe. Add suffix -PED.

Projecting Letters: Stencil face signs only. Add suffix -PL.

Weatherproof: Add suffix -W.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



C. W. Cole & Company, Inc.
 2560 N. Rosemead Boulevard
 South El Monte, CA 91733-1593

Fax (626) 443-9253
 Tel. (626) 443-2473
 info@colelighting.com
 www.colelighting.com