

Signs

Interior/Exterior Applications



KBRFD-612-RED-120



KCRF-612-GRN-277-A2



KWSRF-612-GRN-120



KWSRF-612-GRN-120

**Krystal
Edgelighted Exit Signs**

Description

The Krystal exit signs offers a stylish design suitable for a variety of applications. The aluminum construction is both visually pleasing and possesses corrosion-resistant qualities. The construction is designed so the sign will remain attractive and functional with minimal maintenance requirements.

Features

The exposed construction is black extruded aluminum with a natural satin finished stencil face or exterior applications is optional. There is a choice of incandescent, fluorescent, or LED lamps, and emergency battery operation is optional.

Applications

Aluminex exit signs are appropriate in schools, medical facilities, and all commercial facilities where a clean functional style is desired.

Custom


If your project demands a special fixture we would be pleased to discuss the production of custom fixtures to suit your specific conditions. For more information on our custom capabilities, please contact your local Cole representative.



C. W. Cole & Company, Inc.
 2560 N. Rosemead Boulevard
 South El Monte, CA 91733-1593

Fax (626) 443-9253
 Tel. (626) 443-2473
 info@colelighting.com
 www.colelighting.com

Interior/Exterior Applications

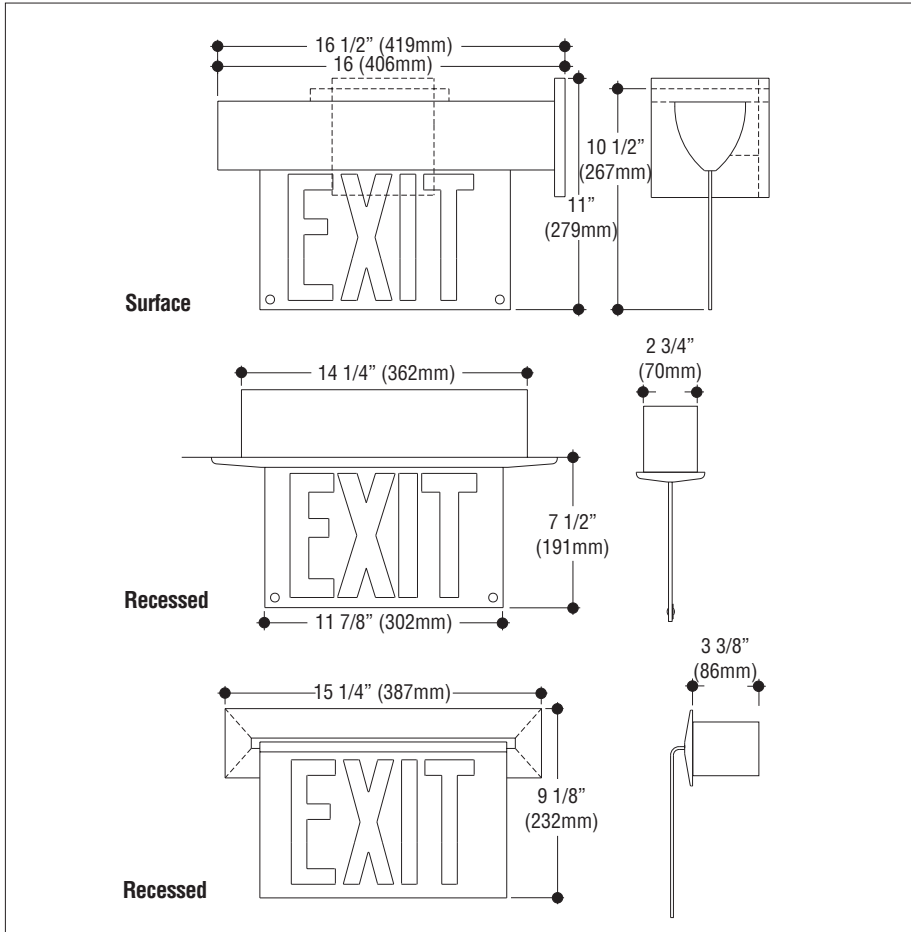

Signs

Krystal Edgelighted Exit Signs

Specifications

Construction

- Cast aluminum trim with concealed hinge
- 20 gauge steel housing • Furnished with two 18 gauge steel mounting angles • Letters are silkscreened on .125" clear acrylic with routed outline • Ceiling mounted models have white backing behind acrylic • Brushed satin finish with clear lacquer

Electrical

- Two 7 watt "PL" fluorescent lamps on separate circuits • Lamps included 277V is optional
- When emergency battery operation is specified, all components are contained in housing. Nickel cadmium battery, test light and button, and two F6T5 fluorescent lamps or LEDs are included with the -EM option.

Mounting

- Surface signs mount to junction box.
- Recessed housing has holes for mounting.

Catalog Numbers

	Surface					Recessed		
	Single Face		Double Face			Single Face	Double Face	
Lamps	Back	Ceiling	End	Ceiling	End	Ceiling	Recessed Wall	Ceiling
2 x 7W (G23 base) compact fluorescent	KWRF-612	KCRF-612	KBRF-612	KCRFD-612	KBRFD-612	KSRF-612	KWSRF-612	KSRFD-612
LED (light-emitting diode)	KWRL-612	KCRL-612	KBRL-612	KCRLD-612	KBRLD-612	KSRL-612	KWSRL-612	KSRLD-612

Required Suffixes

Letter color	-RED	-GRN
Voltage	-120	-277

Options

Directional Arrows: Arrow left, **-AL**; Arrow right, **-AR**; Doublehead, **-A2**; Left and right (for double face), **-A**.

Tamperproof Screws: Tamperproof allen head faceplate screws. Add suffix **-TP**.

Pendant Mount: Provides canopy and 18" stem. Use ceiling model number and add suffix **-S1**.

Emergency Battery Operation: Integral circuitry for 1 1/2 hour fluorescent or red LED operation. Requires oversize canopy or other dimension changes. Add suffix **-EM**.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions



C. W. Cole & Company, Inc.
2560 N. Rosemead Boulevard
South El Monte, CA 91733-1593

Fax (626) 443-9253
Tel. (626) 443-2473
info@colelighting.com
www.colelighting.com