

JOB NAME _____

Type _____

CATALOG NUMBER _____

Signlighter

SL SERIES

SPECIFICATIONS

Construction

- Housing is extruded aluminum with a 12" maximum continuous length; tandem lengths available
- Clear acrylic shielding below for LED light source when aperture is facing downwards. Secondary acrylic shielding used when aperture faces upwards
- 6" long aluminum bracket arms welded to 5" diameter wall mounting plates; special arm lengths up to 30" available
- Standard metallic aluminum polyester coating with optional brushed/satin clear anodized finish.

Electrical


- Continuous lengths of standard and high output LEDs placed within fixture housing to maximize even illumination over sign face
- Universal voltage driver is standard; remotely located in a metal enclosure; optional weatherproof enclosure available
- cETLus listed for use in wet locations

Mounting

- Brackets mount with two screws (not included)
- Left bracket to be mounted over conduit flush with wall, unless otherwise specified
- Remote driver enclosure to be within 18' of the light source.

How to Specify

1. Select catalog number and add length required.
2. Add suffixes for options required to meet job conditions.

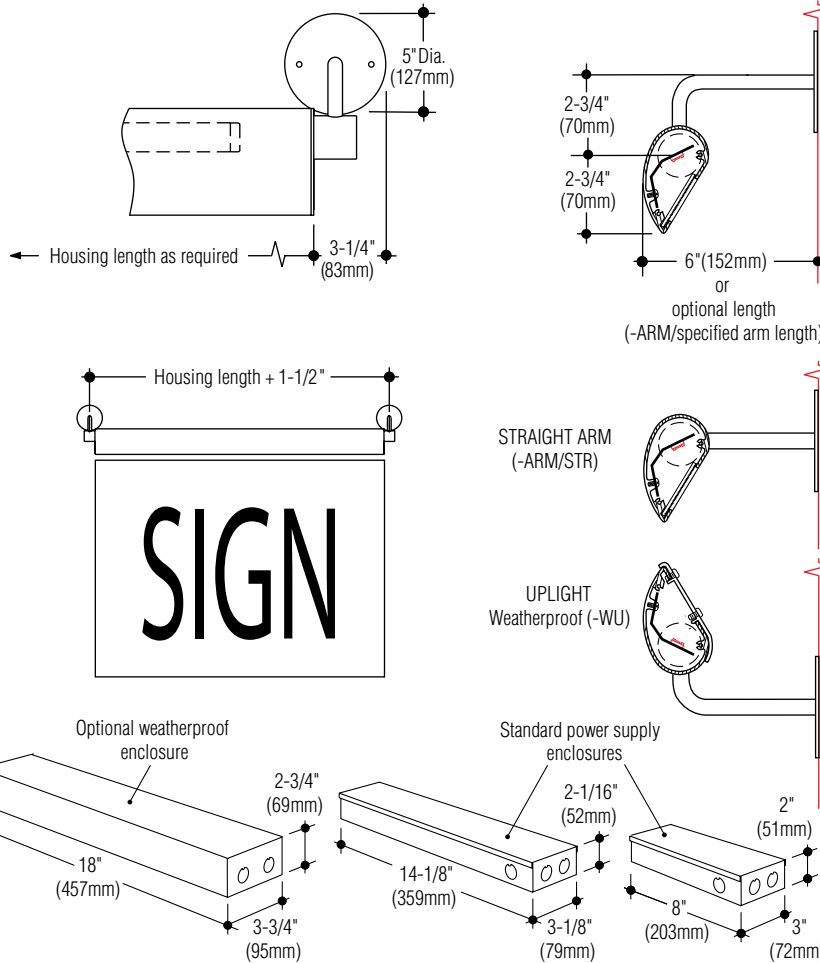

Catalog Number

Lamp

LED 6.0W, per ft. (503 lm @ 3000°K) **SL**- (Housing length): _____
 LED/HO12.5W, per ft. (1323 lm @ 3000°K) **SL**- (Housing length): _____ **-HO**

- Notes: 1. Housing length must be at least 3 1/2" more than the nominal LED length.
 Example: SL-39 1/2" is minimum for 36" LEDs.
 2. Maximum continuous housing length is 12 ft. (3658 mm)

Photometric data available for Signlighter can be downloaded at: www.colelighting.com/photometrics

Options

Alternate Arms Length:

Add suffix **-ARM**/_____ (specify arm length).

Straight Arm: Available on either up or down apertures. Add suffix **-ARM/STR**.

Cable Support: Recommended for use with long mounting arms. Add suffix **-CS**.

Alternate Painted Finishes:

Black, add suffix **-BLK**.

White, add suffix **-WHT**.

Custom color. Specify. Add suffix **-CC**

Dimming: Universal voltage 0-10v capability.

Add suffix **-DIM**.

Brushed Natural Finish: Satin clear anodized.

Add suffix **-BNF**.

Weatherproof: Standard with lens below lamp.

To add acrylic shield when lens is above lamp.

Add suffix **-WU**.

Weatherproof Remote Enclosure: Gasketed

stainless steel power supply enclosure.

Add suffix **-RBW**.

LED color: 4100°K, (584 lm/per ft.),

-HO (1536 lm/per ft.). Add suffix **-4K**



C.W. Cole & Company, Inc.
 2560 Rosemead Boulevard
 South El Monte, CA 91733-1593

Tel. (626) 443-2473

Fax (626) 443-9253

info@colelighting.com

www.colelighting.com