


JOB NAME _____

Type _____

CATALOG NUMBER _____

Darkroom Safelites \ Warning Signs

WALL

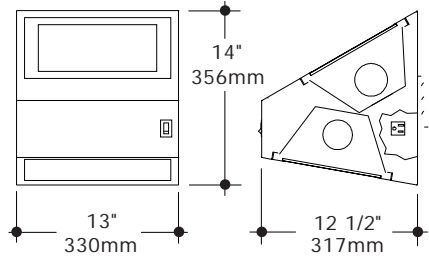

Shown with optional Rocker Switch -SW and Convenience Outlet -CO

Specifications

Construction

- Fixture is 20 gauge steel with black enamel finish
- Diffuser in general illumination uplite compartment is clear prismatic glass
- 8" x 10" Eastman Kodak filter is provided in downlite compartment
- UL/cUL listed

Electrical

- Uplite is wired for one 150W incandescent lamp
- Downlite filter compartment is wired for one 15W incandescent lamp
- Each compartment is to be individually switched
- 120V only

Mounting

- Fixture mounts to recessed junction box in wall.

Catalog Number PHB-810-(filter number)


Options

Convenience Outlet: Add suffix -CO.

Rocker Switch: 3-way (up/off/down). Add suffix -SW.

WARNING SIGNS

See complete line in Directional Signs section.

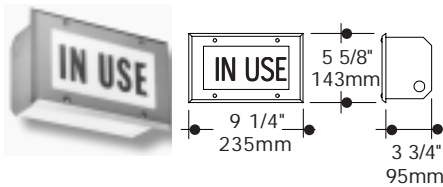

Catalog Number S252-IN USE

Construction: 18 gauge steel, aluminum paint. Red letters on white.

Electrical: One 25W A19 medium base incandescent

Mounting: Recessed housing has flanges with holes for mounting.

Options

Stainless steel faceplate: Add suffix -N.

Fluorescent: One 7W (G23 base) compact fluorescent. 120V standard. Add suffix -F.



Catalog Number S193-DARKROOM IN USE

Construction: Extruded and formed aluminum, satin finish with clear anodize. Red letters on white.

Electrical: Two 25W T6½ intermediate base incand.

Mounting: Surface housing mounts to junction box

Options

Bracket Mounting: Ceiling: -C; End: -LE or -RE.

Recessed Mounting: Specify S191.

Fluorescent: Two 7W (G23 base) compact fluorescent. 120V standard. Add suffix -F.



Catalog Number S130A-A14

Construction: Die-cast and extruded aluminum with white polyester coating. Red letters on white.

Electrical: Two 25W T6½ intermediate base incand.

Mounting: Surface housing mounts to junction box

Options

Bracket Mounting: Ceiling: -C; End: -LE or -RE.

Fluorescent: Two 7W (G23 base) compact fluorescent. 120V standard. Add suffix -F.

Eastman Kodak Safelight Filters

Number	Color	Material Usage
<input type="checkbox"/> OA	Greenish Yellow	Black-and-white contact and duplicating materials and projection films
<input type="checkbox"/> OC	Light Amber	Contact and enlarging papers
<input type="checkbox"/> 1	Red	Blue-sensitive materials and most photo-typesetting materials
<input type="checkbox"/> 1A	Light Red	Slow orthochromatic materials
<input type="checkbox"/> 2	Dark Red	Fast orthochromatic materials, green-sensitive x-ray films
<input type="checkbox"/> 3	Dark Green	Some panchromatic materials
<input type="checkbox"/> 6B	Brown	Blue-sensitive x-ray films
<input type="checkbox"/> 8	Dark Yellow	Color print and color intermediate motion picture films
<input type="checkbox"/> 10	Dark Amber	Color negative papers, materials, panchromatic black-and-white papers
<input type="checkbox"/> 13	Amber	Color negative papers, panchromatic black-and-white papers
<input type="checkbox"/> GBX		Most blue-sensitive x-ray films, most green-sensitive medical x-ray films



C. W. Cole & Company, Inc.
2560 N. Rosemead Boulevard
South El Monte, CA 91733-1593

Fax (626) 443-9253
Tel. (626) 443-2473
info@colelighting.com
www.colelighting.com